


## ❖ K92 External Rotor Motors



Model	A	B
K92-*E-15	15	66
K92-*E-25	25	75
K92-*E-35	35	85
K92-*E-42	42	92

### Specifications of K92 External Rotor Motor

Type	Voltage V	Frequency Hz	Current A	Input W	Speed r/min	Capactitance uF	Net Weight kg	No.On The Curve
K92-2E-15	220	50	0.26	55	2300	2	1.0	1
K92-2E-15	120	60	0.65	75	2500	8	1.0	1
K92-4E-15	220	50	0.21	40	1400	1.5	1.0	2
K92-4E-15	120	60	0.31	40	1700	5	1.0	2
K92-2E-25	220	50	0.40	80	2400	3	1.5	3
K92-2E-25	120	60	0.95	120	2850	10	1.5	3
K92-4E-25	220	50	0.23	50	1380	2	1.5	4
K92-4E-25	120	60	0.55	65	1600	8	1.5	4
K92-2E-35	220	50	0.66	145	2300	4	2.0	5
K92-2E-35	120	60	1.76	210	2500	16	2.0	5
K92-4E-35	220	50	0.42	85	1350	3	2.0	6
K92-4E-35	120	60	0.85	95	1550	10	2.0	6
K92-2E-42	220	50	0.95	215	2500	6	2.2	7
K92-2E-42	120	60	2.0	235	2600	24	2.2	7
K92-4E-42	220	50	0.60	130	1350	5	2.2	8
K92-4E-42	120	60	1.20	140	1500	20	2.2	8

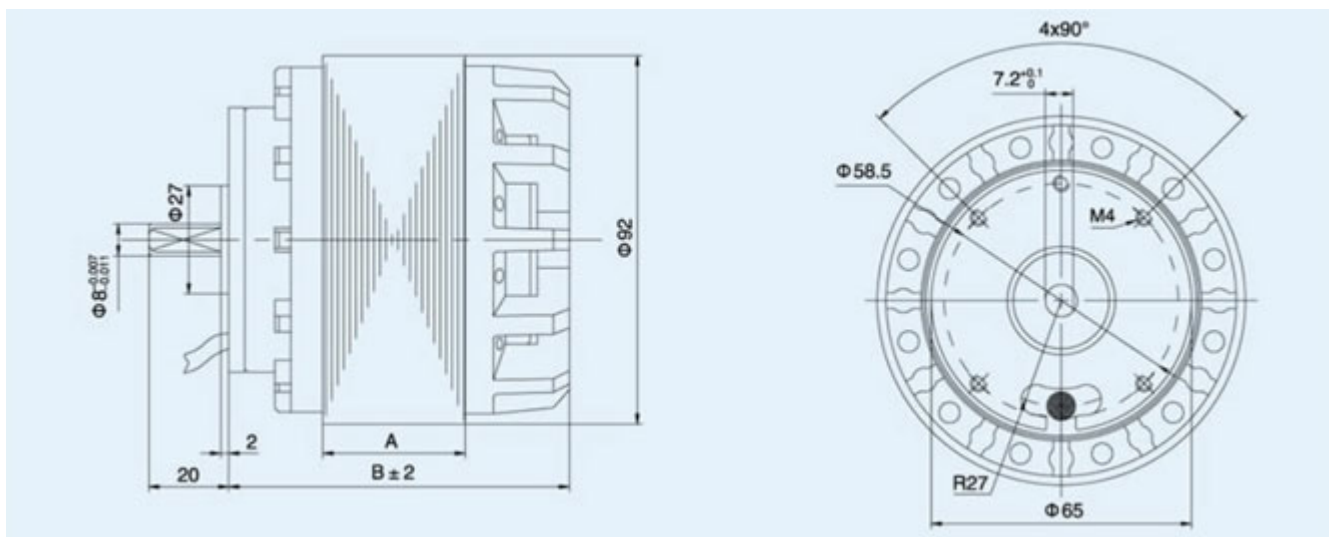




Model	A	B
K102-*E-34	34	104
K102*E-47	47	117
K102*E-60	60	129

### Specifications of K102 External Rotor Motor

Type	Voltage V	Frequency Hz	Current A	Input W	Speed r/min	Capacitance uF	Net Weight kg	No.On The Curve
K102-4E-34	220	50	0.65	140	1380	4	2.5	1
K102-4E-34	120	60	1.65	180	1600	16	2.5	1
K102-4E-47	220	50	0.82	180	1380	6	3.5	2
K102-4E-47	120	60	2.35	250	1600	22	3.5	2
K102-4E-60	220	50	1.20	250	1350	8	4.5	3
K102-4E-60	120	60	2.55	300	1600	32	4.5	3
K102-6E-34	220	50	0.40	80	920	3	2.5	4
K102-6E-34	120	60	0.68	80	1080	8	2.5	4
K102-6E-47	220	50	0.50	108	920	4	3.5	5
K102-6E-47	120	60	1.20	135	960	12	3.5	5
K102-6E-60	220	50	0.75	150	920	6	4.5	6
K102-4E-60	120	60	1.52	180	1050	20	4.5	6

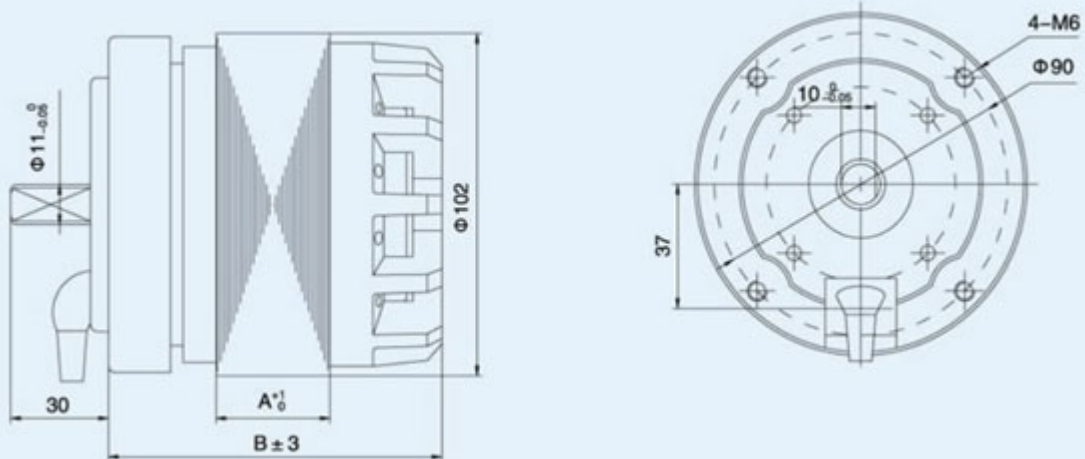



### Specifications of J/D92 External Rotor Motor

Image 1	Image 2	Voltage V	Frequency Hz	Current A	Input W	Speed r/min	Capactitance uF	NOISE dBA	SIZE		NO-ON THE CURVE
									A	B	
J92- 2E-15	D92- 2E-15	220	50	0.26	55	2300	2	50	15	65	1
J92- 4E-15	D92- 4E-15	220	50	0.21	40	1400	1.5	48	15	65	1
J92- 2E-20	D92- 2E-20	220	50	0.33	70	2500	2	50	20	70	2
J92- 4E-20	D92- 4E-20	220	50	0.30	60	1300	2	48	20	70	2
J92- 2E-25	D92- 2E-25	220	50	0.40	80	2400	3	52	25	75	3
J92- 4E-25	D92- 4E-25	220	50	0.32	50	1380	2	50	25	75	3
J92- 2E-35	D92- 2E-35	220	50	0.66	145	2300	4	55	35	85	4
J92- 4E-35	D92- 4E-35	220	50	0.42	85	1350	3	50	35	85	4
J92- 2E-42	D92- 2E-42	220	50	0.69	150	2600	5	58	42	92	5
J92- 4E-42	D92- 4E-42	220	50	0.60	130	1350	5	52	42	92	5
J92- 2E-45	D92- 2E-45	220	50	0.73	160	2600	5	58	45	95	6
J92- 4E-45	D92- 4E-45	220	50	0.65	140	1350	5	52	45	95	6

